



OIL COOLER GUARD FOR 2017+ H-D TOURING

INCLUDED COMPONENTS:

- Oil Cooler Guard




TOOLS NEEDED:

- No tools necessary

QUESTIONS?





EMAIL:
info@getklocked.com
CALL: (605) 996.3700

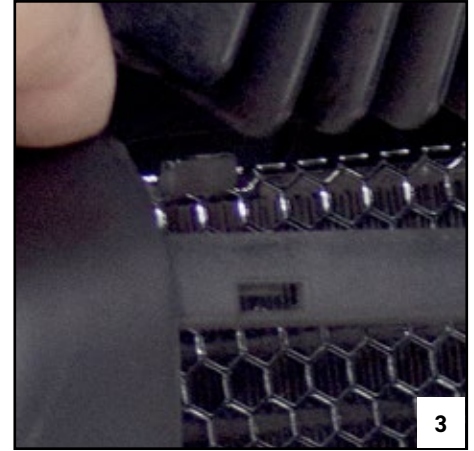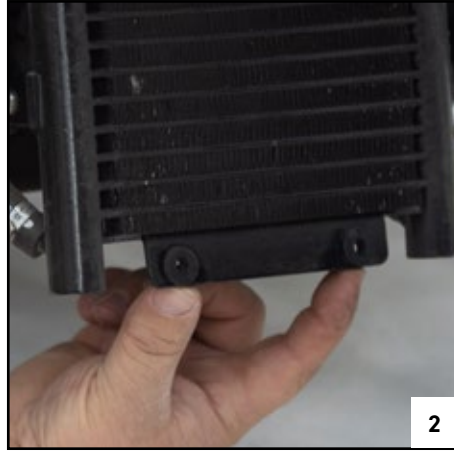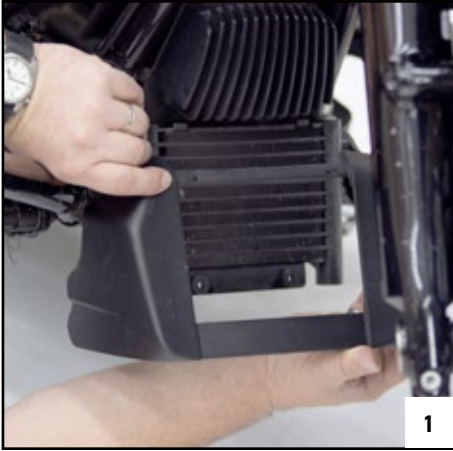

1. Remove the oil cooler cover by pulling the two lower pins from the rubber grommets on the cooler and rotate forward to allow the top to be released from tabs (FIG 1).

NOTE: The grommets may come out of the cooler and remain on the pins. If so, remove them from the cover and reinstall them into the cooler (FIG 2).

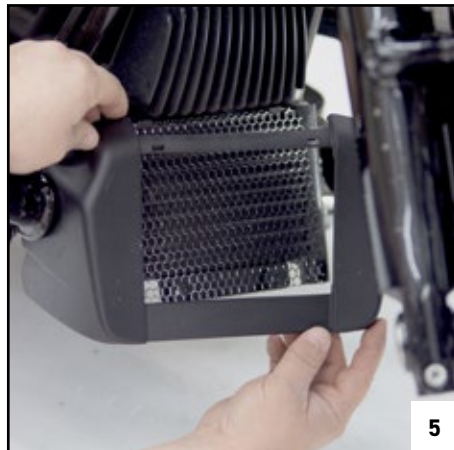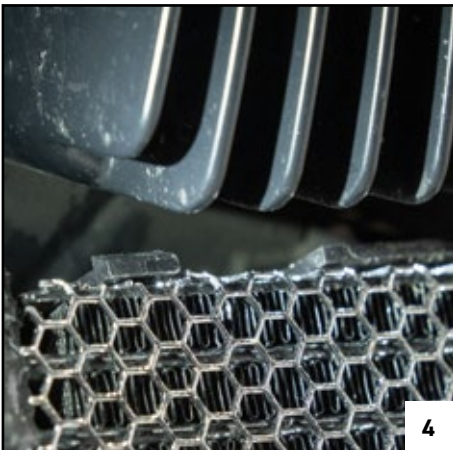

2. Using one of the two options below, install the **Oil Cooler Guard**:
 - A. NON-Fan Assisted Coolers (FIG 3):** Install guard by fitting over the top tabs on the Oil Cooler.
 - B. Fan Assisted Coolers (FIG 4):** Slide top edge of Cooler Guard between the top three plastic tabs of the Fan Shroud and the Cooler.
3. Reinstall the cover over the top tabs, aligning the pins through the clearance holes in the guard. Press the pins back into the rubber grommets in the cooler (FIG 5).