

THUNDER MAX

* CA Proposition 65 "known to the state of CA to cause [cancer][birth defects or other reproductive harm]" see www.p65warnings.ca.gov for details

EA7000 FAN - Oil Cooler 2017-up Air Cooled M8® Touring® Models

excludes 2018 FLTRXSE® and 2019 FLHXSE® (both have a empty fan shroud in place)

*****Plug and play with ThunderMax*** HD® ECM requires dealer to flash fan on.**

Thank you for purchasing a ThunderMax Oil Cooler Fan! Please read through the following instructions before beginning the installation procedure. Following these instructions will ensure that your Fan is installed properly for optimal results.



b. Gently pull outward on cooler, slide fan assy upward into place (notch is the top side)




c. Remove connector plug from bike fan harness, plug the fan connector in.



d. Start the supplied (2) bolts with washers through oil cooler bracket, align fan bracket then tighten the bolts

e. From the bottom side install lock nuts tighten in place

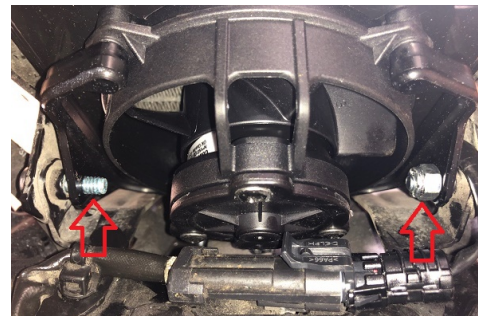


3) Reinstall oil cooler shroud

- 1) Remove oil cooler shroud
- Carefully pull outward at the bottom to unsnap the pins
 - Tilt shroud upward to unlatch upper clips.



- 2) Loosen oil cooler
- Remove 2 oil cooler bolts

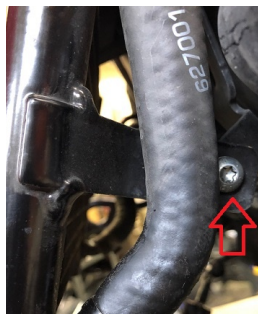

See back of page for more details about your new fan!!