



### FRONT OR REAR SPLINED PEG ADAPTERS

8841

Thank You For Choosing Kuryakyn!

Protect yourself and others from potential injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

#### **WARNING**

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

#### **NOTICE**

This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality or damage the product itself or the product to which it is being attached.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- 2 Splined Peg Adapters
- 2 Spacers
- 1 Installation Instructions

YOU WILL ALSO NEED:

Small flat-blade screwdriver

#### **NOTICE**

These installation instructions contain important information. Ensure that the end user receives this copy and is aware of its importance for future use.

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn **IGN OFF**. Allow the engine and exhaust system to cool.

#### **INSTALL THE FRONT PEG ADAPTERS:**

**STEP 2** Use a small flat-blade screwdriver to remove the E-clip from the footrest pivot-pin; save it for later.

**STEP 3** Remove the pin and existing footrest; save the pin, E-clip, and return spring for later use.



**STEP 4** Refer to **PIC 1**. Assemble the return spring in the new Splined Adapter as shown.

Insert one of the included Spacers as shown; the Spacer can be inserted on the top or bottom side allowing for approx. 1/4" of height adjustment; the Spacer will secure the spring in the Adapter.

**STEP 5** Insert the long leg of the spring in the mount hole as shown in **PIC 2**. Press the Adapter in to align the holes; secure with the pin and E-clip.

**STEP 6** Repeat for the other side.

**STEP 7** Finish the installation by following the procedures included with the footrests (sold separately).

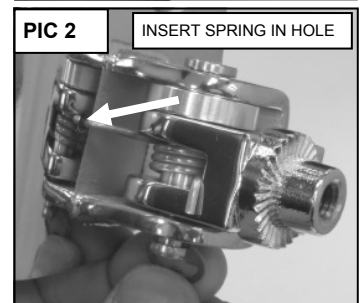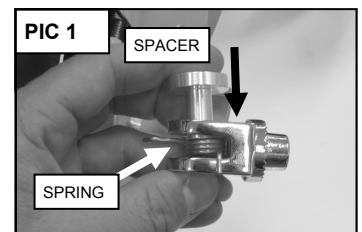

#### **WARNING**

**BEFORE OPERATING THE MOTORCYCLE, ENSURE THAT THE END USER IS FAMILIAR WITH THE POSITION/FUNCTION CHANGES DUE TO THE INSTALLATION OF THIS PRODUCT.**

UNFAMILIAR CONTROLS CAN LEAD TO LOSS OF CONTROL CAUSING SERIOUS INJURY OR DEATH!



### INSTALL THE REAR PEG ADAPTERS:

**NOTE:** Ensure that the detent ball and spring are secured after the pivot pin is removed; the detent ball is very small and easy to lose.

**STEP 8** Use a small flat-blade screwdriver to remove the E-clip from the footrest pivot-pin; save it for later.

Carefully remove the existing footrest; save the detent ball and spring for later use.



**STEP 9** Insert the detent ball in the Adapter on the upper-side to prevent it from falling out during installation.

Sandwich the spring and Adapter in between the mount on the bike as shown in **PIC 3** and **4**.

**STEP 10** Refer to **PIC 4**. Align the holes and secure with the pin and E-clip.

**STEP 11** Repeat for the other side.

**STEP 12** Finish the installation by following the procedures included with the footrests (sold separately).

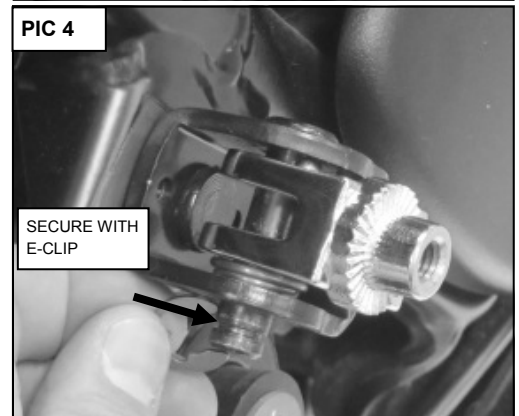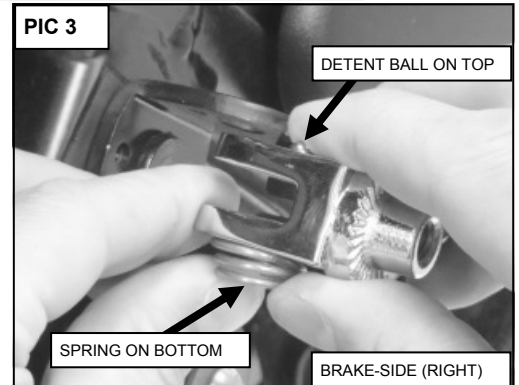

### **WARNING**

**BEFORE OPERATING THE MOTORCYCLE, ENSURE THAT THE END USER IS FAMILIAR WITH THE POSITION/FUNCTION CHANGES DUE TO THE INSTALLATION OF THIS PRODUCT.**

**UNFAMILIAR CONTROLS CAN LEAD TO LOSS OF CONTROL CAUSING SERIOUS INJURY OR DEATH!**

### **NOTICE**

It is the end user's responsibility to ensure that all fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not provide warranty coverage on products or components lost or damaged due to improper installation or lack of maintenance. Periodic inspection and maintenance are required on all fasteners.

#### LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. Merchandise purchased directly from Internet auction sites or any other third party seller is considered sold as is & shall not carry a Kuryakyn warranty. All warranty claims must be directed to the original seller. If unsure please contact the seller to verify they are an authorized Kuryakyn retailer.

#### RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.